


TECHNICAL SHEET

FOL 501MT – Finixa lifting tape 'multi'

Description

Finixa lifting tape uses a high temperature crepe masking tape with a rubber pressure sensitive adhesive. It is designed to protect rubber trims and bodyside mouldings during the automotive renish process. The product is perforated which makes it simple and easy to use and -exible to follow contours and tight curves. It also has a release liner to protect the exposed adhesive which is to be removed before use.

Technical

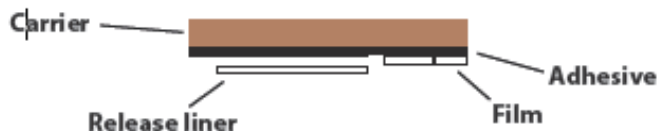

Shelf life

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

Physical properties

Values shown are typical values and not to be used for specification purposes.

Carrier	Impregnated Crepe Paper (Medium Crepe)
Colour	Brown
Adhesive	Rubber
Thickness	0.265my
Film Width	9mm, 12mm, 20mm (+/- 0.1mm)
Length	10m (+/- 0.1m)

Performance properties

Values shown are typical values and not to be used for specification purposes.

Tensile Strength	>34 N/cm	AFERA 5004
Elongation at Break	>9%	AFERA 5004
Heat Resistance	120°C	

The above information is given in good faith, but the user should assure himself that the performance of the product is sufficient for his application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Chemicar Europe cannot be held responsible for product failure unless full testing has been carried out. The client has to decide on the products suitability for their own applications.